



Pushing Performance



People | Power | Partnership

# HARTING Component Range

---



# HARTING Worldwide

---

## **Turning customer wish lists into concrete solutions.**

The HARTING Technology Group, which has its corporate headquarters in Espelkamp, Germany, develops tailored electrical and electronic connector solutions and products for power distribution, data transmission and networking applications. Founded 1945 in Minden, HARTING currently has nearly 4,000 employees worldwide. As the knowledge and information society continues to evolve, networking with customers, suppliers and technology/business partners plays an increasingly crucial role in the domestic and international marketplace.

HARTING has subsidiaries in 37 countries, which are located in close proximity to the customer base and markets. A local presence gives HARTING the opportunity to keep its ear to the ground and react quickly as situations change and developments move forwards.

## **Our goal is top performance.**

While connectors guarantee functionality, they are by no means mere accessories. They form a core element of today's optical and electrical connectivity and infrastructure technology, and support modular machine and system design in a wide range of user industries.

Connector reliability makes a crucial contribution to the problem-free operation of production, telecommunications and medical systems and in a whole host of other applications as well. The ongoing development of our technologies against the backdrop of "Integrated Industry" protects customer investment and ensures long-term functionality in the age of the fourth industrial revolution.



### **Close proximity to the customer.**

The increasing level of industrialization around the world creates expanding markets characterized by very diverse requirements. What they all have in common, however, is the attempt to achieve perfection, workflow efficiency and reliable technology.

The HARTING team at our international subsidiaries takes on a partnership role in the customer relationship. These professionals offer consultancy during the initial product development phase to ensure that our customers have access to the best possible solutions for their products.

### **Our vision: Pushing Performance.**

HARTING delivers components which work very well together. However, in order to give our customers the best possible solution, HARTING can go even further to become an integral part of the value-add process. Our goal is maximum benefit to the customer with no compromises.

### **Quality enhances reliability and creates confidence.**

The HARTING brand stands for exceptional quality around the world. This high standard of performance is the result of focused, non-compromising quality management that is certified and audited on a regular basis for compliance to EN ISO 9001, EMAS and ISO 14001:2004. We take a proactive approach to new requirements, and HARTING ranks as the first rail equipment supplier to receive the new IRIS quality certificate.

### Smart Network Infrastructure

### Device Connectivity

## Connectivity & Networks

An intelligent and powerful connectivity technology forms the foundation of industrial application and manufacturing technology. Solutions from the HARTING triad – Installation Technology, Device Connectivity and Smart Network Infrastructure – generate clear benefits in applications.

The HARTING product and services spectrum covers electrical and electronic connectors, device connection technology and pre-assembled cable and network components. HARTING products supply facilities and machines with data, signals and energy. We provide solutions for application areas including automation, wind energy, solar energy, power generation and distribution, industrial network infrastructure, transportation, industrial devices, broadcast and entertainment, medical, embedded computing systems and machinery.

### Installation Technology

**Han**<sup>®</sup> connectors are the worldwide connector standard in industry.

**Han**<sup>®</sup> connectors impress with their rugged design, convenient handling and modularity of data, signal and power connections. Worldwide.

### Smart Network Infrastructure

With its product series **Ha-VIS**, HARTING offers a consistent range of Ethernet network components and cabling products, which form the communication platform of industrial networks. Under **Ha-VIS** HARTING offers fully integrated RFID solutions.

### Device Connectivity

HARTING's **har**- Device Connectivity technology is a universal and innovative product portfolio of board connector and connection technology for devices in the IP20 to IP65 / IP67 protection categories.





## Industrial connectors Han®

HARTING industrial connectors are used in all kinds of harsh environmental conditions whenever an electrical connection is needed that is secure, robust and detachable. Our product line features contact inserts for sensitive signal transmission as well as modular contacts for power transmission up to 650 A. Our hoods and housings are available in protection degree IP44 up to IP69K. Almost every size is available in six different housing types.

### Advantages

- On-site installation of machines and facilities
- Replacement of production units possible when converting types
- Assembly and disassembly of production equipment possible after a change of location
- Replacement of movable connection cables is possible

### Number of contacts

1 up to 400 contacts + PE

### Rated voltage

25 V up to 5000 V

### Rated current

5 A up to 650 A

### Terminations

- Screw terminal
- Crimp terminal
- HARAX® IDC terminal
- Cage-clamp terminal
- Axial screw terminal
- Solder terminal
- Wrap terminal
- Han-Quick Lock® terminal

### Housing types

Han® Standard, Han® M, Han® HPR, Han® EMV, Han® HMC, Han® High Temp, Han-Yellock®

### Accessories

Covers, cable glands and PCB adapters

### Approvals


UL, CSA for inserts  
Nema 4/12 for hoods and housings  
CCC  
GOST  
GL



International Railway Industry Standard



EN ISO 9001 and 14 001 certified

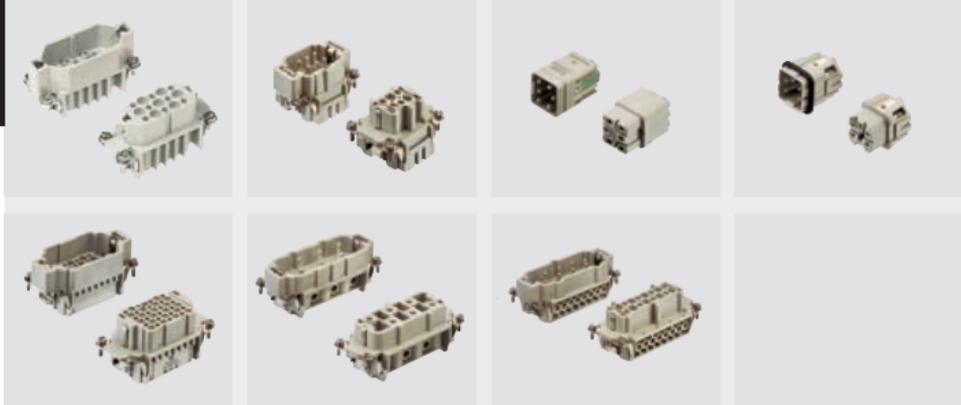

## Standard inserts Han®

HARTING standard inserts are established main components of industrial connectors since several years.

Product range includes a huge quantity of different inserts for sensitive signals up to energy transmission until 100 A.

The inserts are related to defined housings depending on size and type of construction. To achieve various requests different types of terminations were developed.

<b>Distinct features/ advantages</b>	<ul style="list-style-type: none"> <li>■ On-the-spot-installation of machines and plants</li> <li>■ Disassembly and reassembly of production lines when moved</li> <li>■ Quick exchange of cables (i.e. in case of cable break)</li> <li>■ Exchange of production units for a model change etc.</li> </ul>
<b>Number of contacts</b>	1 up to 400 contacts + PE
<b>Rated voltage</b>	25 V up to 5000 V
<b>Rated current</b>	5 A up to 650 A
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Screw terminal</li> <li>■ Crimp terminal</li> <li>■ HARAX® insulation displacement contact (IDC)</li> <li>■ Cage clamp terminal</li> <li>■ Axial screw terminal</li> <li>■ Solder terminal</li> <li>■ Wrap terminal</li> <li>■ Han-Quick Lock® terminal</li> </ul>
<b>Types</b>	Han A®, Han D® / DD®, Han E® / Han® ES / ESS / EE / EEE, Han HvE® / ES, Han-Com®, Han® HsB, Staf®, Han® Q, Han® HMC, Han® High Temp
<b>Accessories</b>	PE-multiplier, docking frames, coding pins
<b>Approvals</b>	UL, CSA for inserts CCC



International Railway Industry Standard



EN ISO 9001 and 14 001 certified



## High Current connectors Han® HC

HARTING High Current connectors offer possibilities for power transmission in the range from 200 A up to 650 A. The inserts will be used together with Han® HPR hoods and housings which lead to guaranteed characteristics like robustness, protection against water pressure and vibration resistance.

The high current contacts are available in crimp- and axial screw termination. Thus they are the solution of choice for traction and auxiliary converters, brakes, door and air-conditioning subsystems.

<b>Distinct features/ advantages</b>	<ul style="list-style-type: none"> <li>■ Safe current transmission due to capacious contact mass</li> <li>■ On-the-spot-installation of machines and components</li> <li>■ Fast exchange of application units in case of over-haul</li> </ul>
<b>Number of contacts</b>	1 – 10 contacts
<b>Rated voltage</b>	2000 V up to 4000 V
<b>Rated current</b>	200 A up to 650 A
<b>Types</b>	Han® K3 /0, K3 /2 Han® HC Modular 250 Han® HC Modular 350 Han® HC Modular 650
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Screw terminal</li> <li>■ Crimp terminal</li> <li>■ Axial screw terminal</li> </ul>
<b>Accessories</b>	Protection covers, cable glands/clamps, Crimping tools
<b>Approvals</b>	UL, CSA for inserts Nema 4/12 for hoods and housings CCC



International Railway Industry Standard



EN ISO 9001 and 14 001 certified



## Han-Modular®

The Han-Modular® series is a system of inserts designed to meet the specific requirements of individual customers. In close cooperation with potential users a range of modular inserts has been developed allowing the simple assembly of custom designed connector sets which meet the diverse requirements encountered by designers today. The modular conception allows the transmission of electrical, optical and pneumatic signals, as well as data and power in one connector.

<b>Advantages</b>	<ul style="list-style-type: none"> <li>■ Custom designs can be simply assembled</li> <li>■ The insert can be configured individually according to the needs of the proper application</li> <li>■ Optimum solutions can be reached</li> <li>■ Stock can be minimized</li> </ul>
<b>Modules</b>	<ul style="list-style-type: none"> <li>Standard modules for 16 A</li> <li>Power modules up to 200 A</li> <li>High density signal modules with up to 25 contacts</li> <li>High voltage modules up to 5000 V</li> <li>Shielded modules for Quintax or D-Sub inserts</li> <li>Data modules for USB, FireWire or RJ45</li> <li>Modules for coaxial wires</li> <li>Optical modules for POF or glass fibre</li> <li>Pneumactical modules for 3, 4 or 6 mm tubes</li> </ul>
<b>Number of contacts</b>	1 up to 42 contacts
<b>Rated voltage</b>	5 V up to 5000 V
<b>Rated current</b>	4 A up to 200 A
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Crimp terminal</li> <li>■ Cage clamp terminal</li> <li>■ Axial screw terminal</li> <li>■ Screw terminal</li> <li>■ Han-Quick Lock® terminal</li> <li>■ PCB solder terminal</li> </ul>
<b>Approvals</b>	<ul style="list-style-type: none"> <li>UL for Modules</li> <li>Nema 4/12 for hoods and housings</li> <li>CCC</li> <li>GOST</li> <li>GL</li> </ul>



EN ISO 9001 and 14001 certified



## Han-Yellock®

Han-Yellock® is a new product series which retains the core functionality but differs significantly from current size and shape formats. The approach of this series makes many new functions possible, for example:

- An internal, latched locking mechanism on the hood
- Multiplies the potentials in the connector with Han-Yellock® modules
- Usage of Han-Modular® modules with adapter frames
- Front and rear assembly of inserts
- Protected Earth contact (PE) in crimp or Quick Lock termination

Thus, the Han-Yellock® offers improved functionality in the form of increased variability, multiplied potential, simplified handling, reduced incidence of errors and maximized safety.

### Advantages

- Efficient optimisation of the purchase
- Less article numbers and less inventory, when planning for the electrical and mechanical layout
- Less wiring work within a machine, during the workflow
- Less steps in the workflow and quicker assembly, even during the after-sales stage
- Reduced down times because of the latched locking mechanism and maintenance-friendly design

### Number of contacts

1 up to 48 contacts + PE  
Possible use of different media and contact arrangements with Han-Modular®

### Rated voltage

500 V

### Rated current

20 A

### Terminations

- Crimp terminal
- Han-Quick Lock® terminal

### Size

10, 30 and 60

### Accessories

Coding pins, ground terminal

### Approvals

cUL  
UL for Han-Yellock® inserts



EN ISO 9001 and 14 001 certified



## Han-Eco®

Han-Eco® – a new housing series made of hightech thermoplastic material.

Han-Eco® is the ideal solution for applications that do not require the full range of product features offered by the Han® B series of housings, and users want to take advantage of the weight and cost advantages.

Like the Han® B standard series, the Han-Eco® series is available in the following sizes: 6 B, 10 B, 16 B and 24 B. Hood with straight or angled cable exit can be supplied.

Fast, simple assembly is another outstanding product feature. Click-and-mate design totally eliminates the need for tools during assembly of the Han-Eco® housing.

The Han-Eco® housing is compatible with nearly the full range of modules from the Han-Modular® series. One extra module fits into the Han-Eco® housing compared to the equivalent product in the Han® B Standard series. This special feature applies to all four sizes.

A optional PE module has been developed specifically for the Han-Eco® housing to hold the protective ground conductor.

### Advantages

- Weight reduction combined with mechanical strength
- Fast assembly process without tools
- Highly resistant to environmental stress, suitable for use in outdoor applications, see Han-Eco® Outdoor
- Nearly the complete range of modules from Han-Modular® series usable


### Features

#### Material

- Hoods/Housings: Polyamide, fibre-glass reinforced
- Locking element: Polyamide, fibre-glass reinforced
- Hoods/Housings seal: NBR / FPM
- Limiting temperatures: -40 °C ... +125 °C
- Flammability acc. to UL 94: V0
- Degree of protection acc. to DIN EN 60 529 for coupled connector: IP65



EN ISO 9001 and 14001 certified

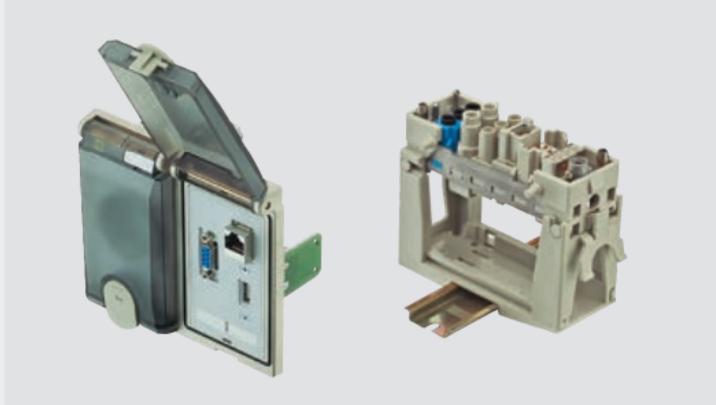

## Components for switch cabinets, service interfaces and PCB adaptors

### Connectors

Series	<p>Han-Snap®</p> <p>Series for connectors within closed electrical operating environments</p> <p>Han-Modular® single module locking</p> <p>Compact connection with one Han-Modular® module in IP20 environment</p>
--------	--

### Frontpanel interfaces

for series	<p>Han-Port®</p> <p>Single- and double frames for power and signals</p> <p>Plug sockets for European and international markets</p> <p>Data inserts using standard interfaces</p>
------------	--

### PCB Adaptor

Series	<p>Han® Q</p> <p>Han DD®</p> <p>Han E®</p> <p>Han-Modular®</p>
Types	<p>Han® Q 5 / 0</p> <p>Han® Q 7 / 0</p> <p>Han® Q 4 / 2</p> <p>Han® Q 8 / 0</p> <p>Han DD®</p> <p>Han E®</p> <p>Han DD® module</p> <p>Han® Axial screw module</p>



EN ISO 9001 and 14 001 certified



## Components for energy transfer and distribution

### Energy distribution

The Han-Power® series makes a fast, simple and comfortable installation of machines possible. The power cable is “tapped” with the Han-Power® S. For the fast and fault-free installation the industry connector is used with the Han-Power® T.

<b>Series</b>	Han-Power®
<b>Types</b>	<b>Han-Power® S</b> - plastic - metal <b>Han-Power® T</b> - plastic with Han® Q 5 / 0 - plastic with Han® Q 2 / 0 - metal with Han® Q 4 / 2 <b>Han-Power® T Modular Twin</b>
<b>Connectors</b>	
<b>Series</b>	Han® Q Han-Compact®
<b>Types</b>	Han® Q 2 / 0 Han® Q 5 / 0 Han® Q 7 / 0 Han® Q 8 / 0 Han® Q 17 Han® Q 4 / 2
<b>System cables</b>	
<b>Number of contacts</b>	2 - 17
<b>Rated voltage</b>	max. 500 V
<b>Rated current</b>	max. 40 A
<b>Application</b>	Transfer of power
<b>Approvals</b>	UL, CSA



EN ISO 9001 and 14 001 certified



## HARTING Hall-Effect current transducers

HARTING's Hall-effect current transducers are used to make potential-free (floating) measurements of DC, AC and mixed currents. They are used for power electronic circuits in industrial and railway applications.

HARTING offers both open-loop and closed-loop current transducers. Both types make use of the well-established Hall effect for taking measurements.

### Advantages

- Robust housing and termination technique
- Customer-specific termination techniques are available on request
- Excellent immunity to interference from external magnetic fields
- Extended temperature range: -40 °C – 85 °C
- Tested for shock and vibration in accordance with IEC 61373 Cat 1B
- Wide measuring range with high precision
- Superior surge current resistance

### The HCS Hall-effect current transducer:

closed-loop transducers for industrial applications

Primary rated current      200 A, 300 A, 500 A, 1000 A, 2000 A

Transmission ratios      1:2000, 1:5000

Frequency range      DC...100 kHz

### The HCSR Hall-effect current transducer:

closed-loop sensors for railway applications

Primary rated current      500 A, 1000 A, 2000 A

Transmission ratios      1:4000, 1:5000

Frequency range      DC...100 kHz

### The HCSE Hall-effect current transducer:

open-loop transducer for industrial applications

Primary rated current      100 A, 300 A, 500 A, 800 A

Frequency range      DC...50 kHz



EN ISO 9001 and 14001 certified



## An overview of Han® tools

---

We offer a wide variety of processing tools for many different applications in our comprehensive Han® series of products. With a wire cross-section range from 0.14 mm<sup>2</sup> to 240 mm<sup>2</sup>, they can be used for either signal or power transmission applications. You can also put our HARTING expertise to work for you when connecting sensitive fibre optic cables – for reliable and safe results.

Whether you're working on a service call or with mass-production machines, the proper tools for your purposes are available. Our high-quality HARTING tools ensure that your work meets the applicable standard specifications.

### A brief overview of our Han® tools portfolio

- Manual crimping tools for Han® contacts (0.14 – 10 mm<sup>2</sup>)
- Pneumatic crimping tools (0.14 – 10 mm<sup>2</sup>)
- Automatic crimping machines (0.14 – 10 mm<sup>2</sup>)
- Crimping tools for high current contacts (10 – 240 mm<sup>2</sup>)
- Crimping tools for fibre optic contacts
- Crimping tools for other contacts (e.g. coaxial)
- Torque tools for axial screw termination technique
- Installation and removal tools
- Screwdrivers and stripping tools
- Punching tools for panel cut outs in Han® housings



EN ISO 9001 and 14 001 certified



## Fibre optic data link systems and components

### Electro-optic converters

Solutions for optical wavelengths 660 nm, 850 nm and 1300 nm  
 Optical transmitter and receiver for F-ST and F-SMA  
 Special versions with up to 16 optical elements  
 Optical transceivers for M12 connectors

### Connectors

Simplex and multipole connectors for glass and polymer optical fibres  
 Quick assembly connectors for polymer optical fibres  
 Contacts for glass and polymer optical fibres for use in Industrial Han® connectors  
 Connectors up to IP68

### Cables

For in- and outdoor applications  
 Hybrid cables

### Cable assemblies

Cable assemblies with fibre optic and hybrid cables  
 Customer specific harnesses

### Accessories

Tools for connector assembly and test equipment for service purposes



EN ISO 9001 and 14 001 certified



## Value Added Business (VAB)

Worldwide implementation of customer specific applications. Wide range of services from specification to production. Electrical, mechanical design and engineering as well as concept development for power and data transmission for control units and systems.

### Product groups

<b>Power Cable Solutions (PCS)</b>	Cable assemblies for power distribution Applications with industrial connectors of the Han® product family
<b>Data &amp; Signal Solutions (DSS)</b>	Cable assemblies for data and signal transmission Ethernet, fibre optics and coaxial cable for customer specific requirements
<b>Customer Specific Solutions (CSS)</b>	System solutions for cabling, control units and cabinets Customer specific engineering for cable harnesses, sub-systems and systems



EN ISO 9001 and 14001 certified



## Ha-VIS RFID system solutions

Ha-VIS RFID system solutions from HARTING like tracking & tracing, maintenance, asset management, supply chain management and production planning.

For these applications HARTING has developed a complete and scalable product portfolio and solution portfolio of hard- and software with following characteristics:

<b>Transponder</b>	Robust transponder for challenging applications with up to IP69K and 210 °C Applications on metal and in concrete
<b>Reader</b>	High performance RFID Reader Highest read range of up to 16 m For most challenging environments with a lot of metal (e.g. in machines)
<b>Antennas</b>	Antennas for RFID-Gates Antennas for automation / machinery
<b>Mobile Reader</b>	Extremely robust Suitable for industrial applications

Ha-VIS RFID is the complete Ha-VIS RFID program for system integrators.



EN ISO 9001 and 14 001 certified



## IP30 Ethernet Switches

Our Ha-VIS eCon 2000/3000/9000 and our Ha-VIS mCon 3000/9000 Fast and Full Gigabit Ethernet Switches have been designed for industrial applications. Our unmanaged Ethernet Switches from our Ha-VIS eCon 2000/3000 lines have a flat/thin shape so that you can save space when mounting them on DIN rails in electrical cabinets. Various combinations of variants with RJ45, fibre optic cables and SFP ports are available. Our switches use the PoE+ standard to supply power to end devices. Auto-negotiation, auto-polarity, auto-MDI(X) and surge protection are all supported – so that the Plug-and-Play initial setup process is both quick and easy.

The fully managed Ethernet Switches from our Ha-VIS mCon product line feature a wide range of configuration and diagnostic options. These options can be easily configured using the web interface or SNMP. The switches can easily be set up and configured in the field using an SD card or the multi-functional push button. Our Ha-VIS mCon 3000 Next Generation line of Ethernet Switches can be used as PROFINET IO devices.

Their innovative fast-track switching allows them also to be used for real-time applications.

### The advantages of Ha-VIS Ethernet Switches

- Fast and full gigabit Ethernet, non-blocking in accordance with IEEE 802.3
- Supports auto-negotiation, auto-polarity and auto-MDI(X)
- Industrial temperature range from -40 °C to +70 °C
- Variants with RJ45, SC multi-mode fibres, single-mode fibres and SFP
- Energy supply of up to 4 end devices via PoE+ (137 watts) in accordance with IEEE 802.3at
- Minimum energy consumption owing to energy-efficient Ethernet, IEEE 802.3az
- IP30 aluminium/steel sheet enclosures
- Wide range voltage supply, 24/48 V DC
- Surge protection and reverse voltage protection
- PROFINET IO Device (CCB)
- Time synchronization according to IEEE1588v2



EN ISO 9001 and 14001 certified



## IP40 / IP65 / IP67 Ethernet Switches

The Fast and Gigabit Ethernet Switches of the product families Ha-VIS eCon 4000, Ha-VIS eCon 7000, Ha-VIS mCon 4000 and Ha-VIS mCon 7000 are designed for direct deployment in industrial areas.

Through their high degree of protection (IP40 - IP67), their industrial Ethernet interfaces (M12, Han® 3 A RJ45) and their robust metal housing, they are suitable for harsh industrial environments and for almost all mounting locations without a switch cabinet. The Ha-VIS eCon Ethernet Switches operate as unmanaged switches in Store and Forward Switching Mode and support Auto-crossing, Auto-negotiation and Auto-polarity.

The Ha-VIS mCon Ethernet Switch operates as a managed switch and comes with comprehensive management functions.

### Advantages

- Robust metal housing
- Reduced cabling costs in building industrial Ethernet networks
- Space saving, directly installable on machinery or in plant
- Plug & Play Installation
- RoHS compliant

### Ethernet Switches

Fast Ethernet (Data transfer rates of 10 /100 /1000 Mbit/s)  
 Ethernet interfaces conform to PROFINET and ODVA  
 High IP40 / IP65 / IP67 degree of protection  
 Extended operational temperature range and mechanical stability meet the highest demands  
 Ha-VIS mCon supports two access methods for management: SNMP and a convenient Web-Access



EN ISO 9001 and 14 001 certified



## Circular connectors

### Connectors with HARAX® termination technique

Types	<ul style="list-style-type: none"> <li>Unshielded M8 connectors</li> <li>Shielded and unshielded M12 connectors</li> <li>7/8" connectors</li> <li>Shielded M12 panel feed throughs</li> </ul>
Advantages	<ul style="list-style-type: none"> <li>■ Compact and robust design</li> <li>■ Quick and easy field assembly</li> <li>■ No special tools required</li> <li>■ Compatible with an extensive range of cables with different cross core sections and outer diameters</li> </ul>

### Connectors with crimp termination technique


Types	<ul style="list-style-type: none"> <li>Shielded M12 connectors for data transmission and power supply</li> <li>Shielded panel feed throughs M12 Crimp</li> </ul>
Advantages	<ul style="list-style-type: none"> <li>■ Compact and robust design</li> <li>■ Vibration safe connection</li> <li>■ Quick and easy field assembly with HARTING crimp tooling</li> </ul>

### M12 Connectors for high data rates – har-speed M12

Types	<ul style="list-style-type: none"> <li>Connectors with crimp and HARAX® termination for cables</li> <li>Connectors for the PCB</li> </ul>
Advantages	<ul style="list-style-type: none"> <li>■ x-coding acc. to IEC 61 076-2-109</li> <li>■ Performance class E<sub>A</sub></li> <li>■ Component Category 6<sub>A</sub></li> <li>■ AWG 23-28</li> <li>■ Robust and vibration safe</li> </ul>



EN ISO 9001 and 14 001 certified


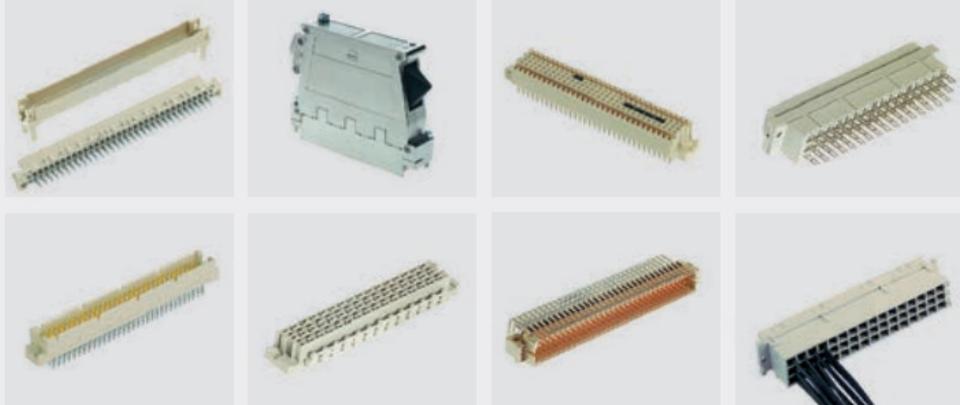


## PCB connectors contact spacing 2.54 mm

<b>Connectors DIN 41 612</b>	acc. to IEC 60 603-2
<b>Types</b>	<p>Full types: B, C, D, E, F, FM, H, Q, R, R (HE 11)</p> <p>Half types: 2B, 2C, 2Q, 2R, 2F</p> <p>Third types: 3B, 3C, 3Q, 3R</p> <p>Complementary types: F9, H3</p> <p>Mixed types: M (24+8, 42+6, 60+4, 78+2), M inverse (6+10, 24+8, 42+6, 60+4, 78+2), MH (24+7, 21+5)</p> <p><b>har-bus®</b> 64 for VME 64x (acc. to IEC 61 076-4-113) special variants for railway (NFF)</p>
<b>Number of contacts</b>	3 – 160
<b>Working current</b>	1 – 15 A max. 40 A (special contacts)
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Straight and angled solder pins</li> <li>■ Solder lugs</li> <li>■ Press-in technology</li> <li>■ SMC (Surface Mount Compatible) types</li> <li>■ Crimp terminals</li> <li>■ Wire wrap posts 0.6 x 0.6 and 1 x 1 mm</li> <li>■ Insulation displacement terminals</li> <li>■ Faston blades</li> <li>■ Cage clamp terminals</li> </ul>
<b>Accessories</b>	<p>Extensive range of hoods in plastic, metallized plastic or full metal</p> <p>Fixing brackets and interfaces</p> <p>Shrouds</p> <p>Tooling for press-in and crimp termination</p>
<b>Service</b>	Concepts for SMC and press-in technology
<b>Approvals</b>	UL, IEC, CECC, NFF



EN ISO 9001 and 14 001 certified

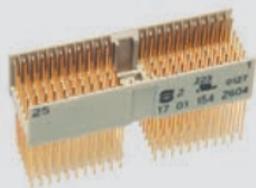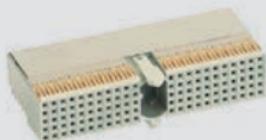

## Metric connectors

### *har-bus® HM*

with 5 resp. 8 rows

acc. to IEC 61 076-4-101, CompactPCI

Types

A, AB<sub>19</sub>, AB<sub>22</sub>, AB<sub>25</sub>, B<sub>19</sub>, B<sub>22</sub>, B<sub>25</sub>, C, D, DE, E, Monoblock 47 (A + B<sub>22</sub>)

Number of contacts

max. 220 signal contacts (308 fully shielded)

### *har-bus® HM 6 row*

Extension of IEC 61 076-4-101

Types

Modules with optional features such as guiding, coding and end wall  
SMC types

Number of contacts

72 or 144 signal contacts

### *har-bus® HM Power*

Types

Straight female press-in modules  
Angled male press-in and SMC modules  
Lagging / leading contacts

Working current

max. 23 A at 70 °C

### All connector families

Accessories

Tooling for press-in termination

Service


Shielding effectiveness measurements  
Signal integrity analysis  
Computer simulations (3D-FEM)  
SPICE modelling  
Concepts for SMC technique

Approvals

UL, CSA, VDE, IEC, CECC



EN ISO 9001 and 14 001 certified

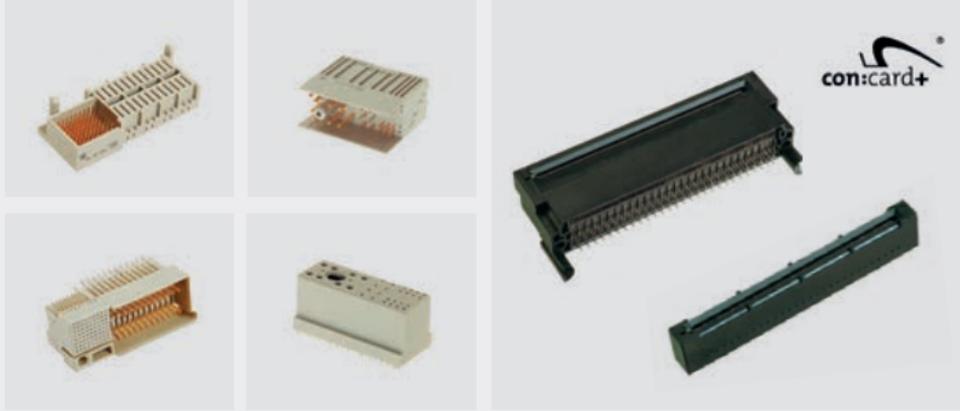

## Connectors for AdvancedTCA<sup>®</sup> / MicroTCA<sup>™</sup>

<b>AdvancedMC<sup>™</sup> connectors</b>	According to PICMG AMC.0 / MTCA.0 specification
<b>Types</b>	Right angled version for AdvancedTCA <sup>®</sup> and straight version for MicroTCA <sup>™</sup> . The card edge connectors are for direct mating with Advanced Mezzanine Cards (AdvancedMC <sup>™</sup> ). With <b>con:card+</b> features for enhanced contact reliability.
<b>Number of contacts</b>	170
<b>Contact spacing</b>	0.75 mm
<b>Terminations</b>	Press-in technology, 0.55 mm PCB hole diameter
<b>Transmission rate</b>	Suitable for 12.5 Gbps applications


**AdvancedTCA<sup>®</sup> μTCA<sup>™</sup>**

<b>Power connectors</b>	According to PICMG 3.0 / MTCA.0 specification
<b>Types</b>	Backplane and daughter card connectors for AdvancedTCA <sup>®</sup> Backplane and module connector for MicroTCA <sup>™</sup> Mixed pin assignment of signal and power contacts
<b>Number of contacts</b>	30 / 96
<b>Working current</b>	16 A / 9.3 A @ 80% derating
<b>Termination</b>	Press-in technology

<b>All TCA connectors</b>	
<b>Accessories</b>	Tooling for press-in termination
<b>Design-in support</b>	Signal integrity analysis (S-parameter, TDR, eye-diagrams) Computer simulation and modelling (e.g. SPICE) Test boards and 3D models (STEP, IGES)



EN ISO 9001 and 14 001 certified

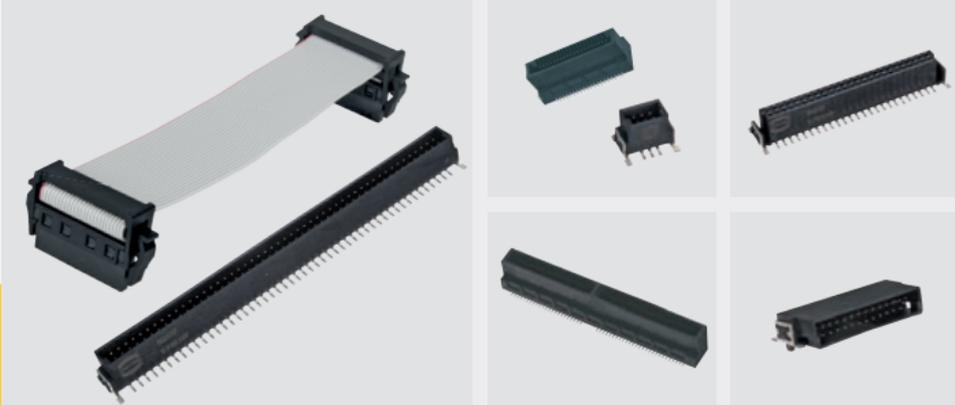

## Mezzanine connectors

### har-flex® connectors

Variants	Straight / angled / IDC cable assemblies
Advantages	<ul style="list-style-type: none"> <li>■ Optimized utilization of PCB real estate due to flexibility in choice of contact count</li> <li>■ Various stacking heights</li> <li>■ High contact density for reduced footprint</li> <li>■ Suitability for automated processing</li> </ul>
Number of contacts	6, 8, 10, ..., 96, 98, 100
Contact spacing	1.27 mm x 1.27 mm
Rated current	min. 0.8 A at 70 °C
Terminations	<ul style="list-style-type: none"> <li>■ SMT</li> <li>■ Insulation displacement termination for flat cables (AWG 30/1 or AWG 30/7)</li> </ul>

### MCE connectors

Advantages	<ul style="list-style-type: none"> <li>■ Very flexible stacking heights</li> <li>■ SMT compatible</li> <li>■ Data rates up to 14 Gbps</li> <li>■ Tape &amp; reel packaging for high volume production</li> </ul>
Number of contacts	40 or 100
Contact spacing	0.8 mm
Rated current	1.7 A
Termination	SMT

### For both connector families

Service	Concepts for SMT technique
Fields of application	Industrial, telecommunications and medical



EN ISO 9001 and 14001 certified



## har-flexicon® PCB terminal blocks und connectors

Advantages	<ul style="list-style-type: none"> <li>■ Rapid and tool-less connection of single wires</li> <li>■ Low processing cost with automatic mount</li> <li>■ High level of rigidity on the PCB with large-area fixings</li> <li>■ High packaging density in pitches 1.27 mm and 2.54 mm</li> </ul>
Number of contacts	2 – 25
Contact spacing	1.27 mm, 2.54 mm, 3.50 mm, 3.81 mm, 5.00 mm, 5.08 mm
Rated current	up to 17.5 A
Conductor size	0.05 – 2.5 mm <sup>2</sup>
Terminations	<ul style="list-style-type: none"> <li>■ Push-in-spring cage</li> <li>■ Insulation displacement (IDC)</li> <li>■ Screw</li> <li>■ SMT / SMC (reflow soldering)</li> <li>■ Wave soldering</li> </ul>
Variants	Vertical, horizontal



EN ISO 9001 and 14 001 certified



## D-sub connectors – Standard and IP67

<b>D-Sub</b>	acc. to CECC 75 301-802
<b>Number of contacts</b>	9, 15, 25, 37, 50
<b>Working current</b>	2 – 7.5 A
<b>Fields of application</b>	Industrial electronics, office electronics, Information and telecommunication technology
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ European, US and low-profile footprint</li> <li>■ SMT (Surface Mount Technology) types</li> <li>■ SMC (Surface Mount Compatible) types</li> <li>■ Solder buckets</li> <li>■ Straight and angled solder pins</li> <li>■ Crimp terminals</li> <li>■ Insulation displacement termination</li> <li>■ Press-in technology</li> <li>■ Wire wrap terminals</li> </ul>
<b>Accessories</b>	Extensive range of hoods: plastic, metallized plastic, plastic with internal metal plate and full metal (e.g. InduCom style for special EMC requirements) A large choice of locking systems
<b>Approval</b>	UL

<b>D-Sub IP67</b>	acc. to DIN 40 050, IEC 529
<b>Number of contacts</b>	9, 15, 25, 37, 50
<b>Working current</b>	5 A
<b>Fields of application</b>	Any applications in the industrial, medical, machinery and transportation markets, which are to be protected from ingress
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Rear panel mount straight and angled for PCB application</li> <li>■ Rear and front panel mount solder cup</li> <li>■ Solder cup for cable inside application in conjunction with IP67 hood range</li> </ul>
<b>Accessories</b>	IP67 plastic or metallized plastic hoods with a large range of screws
<b>Approval</b>	UL



EN ISO 9001 and 14 001 certified



## D-Sub connectors – Mixed, high density and filter

<b>D-Sub mixed</b>	acc. to DIN 41 652 T1
<b>Variants</b>	2W2, 2W2C, 3W3, 3W3C, 5W1, 5W5, 7W2, 7W7, 8W8, 9W4, 11W1, 13W3, 13W6, 17W2, 21W1, 21WA4, 24W7, 25W3, 27W2, 36W4, 43W2
<b>Working current</b>	Signal 5 A; power up to 40 A
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Solder cups</li> <li>■ Crimp terminals</li> <li>■ SMC (Surface Mount Compatible) types on request</li> </ul>
<b>Accessories</b>	<ul style="list-style-type: none"> <li>■ Wide range of special contacts, like coaxial, power, high voltage and pneumatic contacts</li> <li>■ Special accessories like kits for blind mating</li> </ul>

<b>D-Sub high density</b>	
<b>Number of contacts</b>	15, 26, 44, 62, 78
<b>Working current</b>	up to 2 A
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Straight and angled solder pins</li> <li>■ Solder cups</li> <li>■ Crimp terminals</li> </ul>

<b>D-Sub filter</b>	
<b>Number of contacts</b>	9, 15, 25, 37
<b>Working current</b>	up to 7.5 A
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Solder buckets</li> <li>■ Straight and angled solder pins</li> <li>■ SMC (Surface Mount Compatible) types</li> </ul>
<b>Accessories</b>	<p>Various integrated filters possible with ferrite filters and C filters 47 pF, 470 pF, 1000 pF and 3900 pF etc. All custom designs possible (based on a contact-by-contact approach)</p> <p>D-Sub filter with mixed contacts available on request</p>

<b>All connectors</b>	
<b>Accessories</b>	<p>Extensive range of hoods</p> <p>Tooling for crimp termination</p> <p>Special configurations on request</p>
<b>Fields of application</b>	Industrial, medical, telecom, computer and aerospace applications
<b>Approval</b>	UL



EN ISO 9001 and 14 001 certified



## Micro electronic connectors

<b>har-mik®</b>	<p>Miniature D connector contact spacing 1.27 mm acc. to:            SCSI 2 – SCSI 3, I.P.I.2, HI.P.P.I            EIA/TIA 232 E (RS 232 E), IEEE 1284            IEC 61076-3-100 for bellows connectors (with leaf contact design)            IEC 61076-3-101 for pin and socket connectors (with blade and fork contact design)</p>
<b>Number of contacts</b>	14 – 100
<b>Working current</b>	1 A
<b>Working voltage</b>	240 V ~
<b>Fields of application</b>	Input/output interface for use in EDP, industrial and office electronics and telecommunication
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ Straight and right angled solder pins</li> <li>■ IDC for discrete wires</li> <li>■ IDC for flat cables</li> <li>■ Press-in technology</li> <li>■ SMC (Surface Mount Compatible) types</li> </ul>

<b>har-link®</b>	<p>Metric connector contact spacing 2.0 mm acc. to IEC 61076-4-107</p>
<b>Number of contacts</b>	10
<b>Working current</b>	1.5 A
<b>Fields of application</b>	Telecommunication Automation Professional broadcast Transportation
<b>Terminations</b>	<ul style="list-style-type: none"> <li>■ IDC (for male connector)</li> <li>■ Right angled solder pins (for female connector)</li> </ul>


The **har-link®** connector system is a modular, compact and robust PCB-to-cable interface with excellent data transmission properties for high speed networking and telecommunication (up to 2 Gbit/s per twisted pair).

### Both connector families

<b>Approval</b>	UL
-----------------	----



EN ISO 9001 and 14001 certified

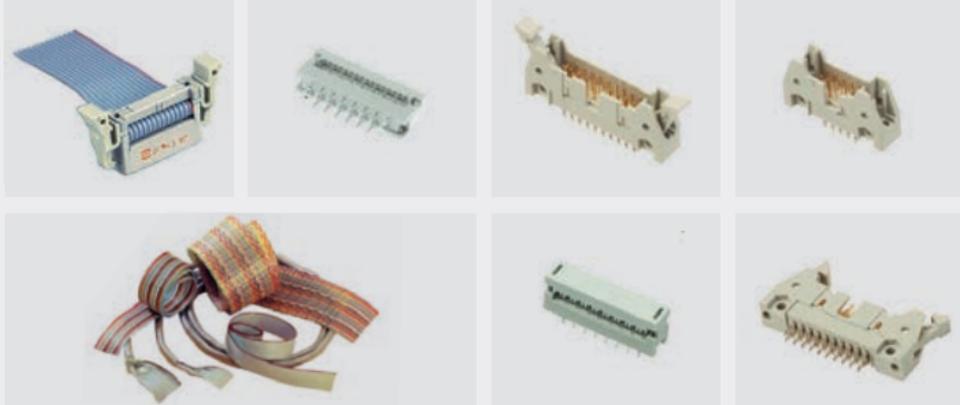

## IDC connector systems for flat cables

### Contact spacing 2.54 mm x 2.54 mm

#### SEK IDC connectors


Male and female connectors	acc. to IEC 60 603-13, comply with MIL-C 83 503
Number of contacts	6, 10, 14, 16, 20, 26, 30, 34, 40, 50, 60, 64
Working current	1 A max.
Working voltage	320 V
Terminations	<ul style="list-style-type: none"> <li>■ Female: IDC for flat cable</li> <li>■ Male standard and low profile:               <ul style="list-style-type: none"> <li>- Straight and right angled solder pins</li> <li>- Press-in technology</li> <li>- SMC (Surface Mount Compatible) versions</li> <li>- Wire wrap posts</li> </ul> </li> </ul>
Accessories	Strain relief, locking lever, board lock, vacuum cover for pick-and-place assembly
Packaging	Card board box, tape on reel, tube
Approval	<b>UL</b> US
Service	Concepts for SMC and press-in technology

#### PCB transition connectors

	2-rows, 4-rows, DIP
Number of contacts	2 rows: 4, 6, 8, 10, 14, 16, 20, 24, 26, 30, 34, 40, 50, 60, 64 4 rows: 10, 16, 20, 26, 34, 40, 50 DIP: 14, 16, 24, 28, 40
Working current	1 A max.
Terminations	<ul style="list-style-type: none"> <li>■ Cable side: IDC</li> <li>■ PCB side: solder pins</li> <li>■ Standard or kinked pin for 2-rows versions</li> </ul>
Assembly	2-rows: assembled lever 4-rows and DIP: separate cover



EN ISO 9001 and 14 001 certified

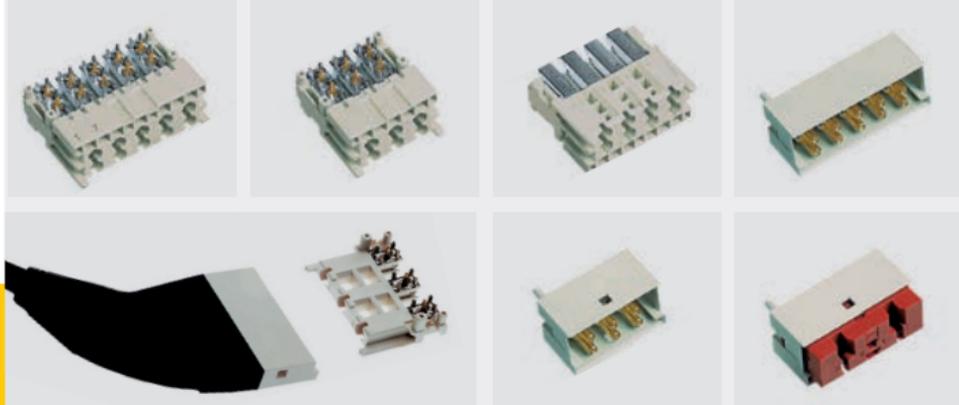

## Mini Coax connector system

### Mini Coax

Types	1 SU, 1.25 SU, 1.5 SU (1 System Unit = 25 mm)
Number of contacts	2, 4, 6, 8 und 10 (other loadings on request)
Frequency range	0 - 2.5 GHz
Nominal impedance	50 Ω
Terminations	Press-in technology

### Mini Coax+

Frequency range	0 - 4 GHz
Nominal impedance	50 Ω
Terminations	SMT / SMC

### All connectors


Accessories	Tooling for press-in termination Pre-assembled cables Terminators
Service	Shielding effectiveness measurements Signal integrity analysis Computer simulations (3D-FEM) SPICE modelling
Approvals	UL, VDE, IEC, CECC



EN ISO 9001 and 14 001 certified

# Notes



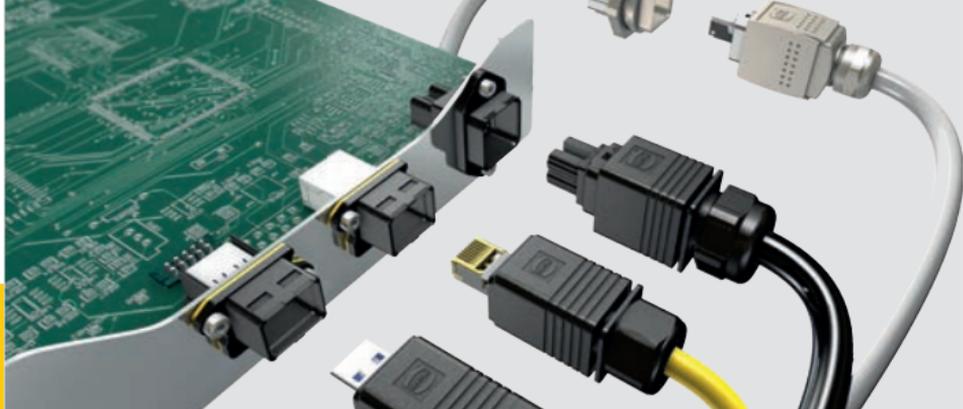

## Compact IP65 / IP67 PushPull connectors for data, power and signal

### PushPull connectors according to IEC 61 076-3-106 variant 4 and IEC 61 076-3-117 variant 14 for device connectivity

Fields of application	Factory and building automation PROFINET applications, transportation, lighting and display technology. Ideal for compact devices in harsh environments or in outdoor applications
Locking mechanism	PushPull one-hand locking
Housing material	Plastic or metal
Accessories	Protective caps, cable assemblies, coding pins and tools
Protection class	IP65 and IP67

#### Data interface

Copper based	RJ45 acc. to IEC 60 603-7
Number of contacts	4 or 8
Wire terminations	HARAX® IDC or piercing
Fibre based	LC duplex acc. to IEC 61 754-20 or SCRJ acc. to IEC 61 754-24
	LC duplex: singlemode or multimode GOF SCRJ: POF, HCS, singlemode or multimode GOF

#### Hybrid interface

Number of contacts	4 x data + 3 x power
Working current	5 A
Working voltage	48 V DC
Wire terminations	Crimp and solder terminals

#### USB interfaces

USB types A 2.0, A 3.0 and B 2.0

#### Power interfaces



Number of contacts	4 or 2 + PE or 4 + PE
Working current	12 -16 A
Working voltage	48 V DC, 250 V AC or 400 / 690 V AC
Wire terminations	Crimp, solder or cage clamp terminals and Quick Lock

#### Signal interface

Number of contacts	10 x D-Sub crimp
Working current	5 A
Working voltage	60 V



EN ISO 9001 and 14 001 certified

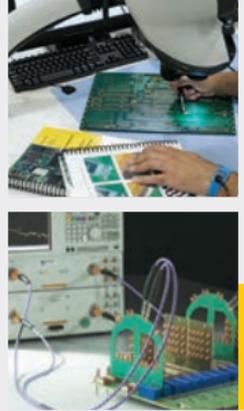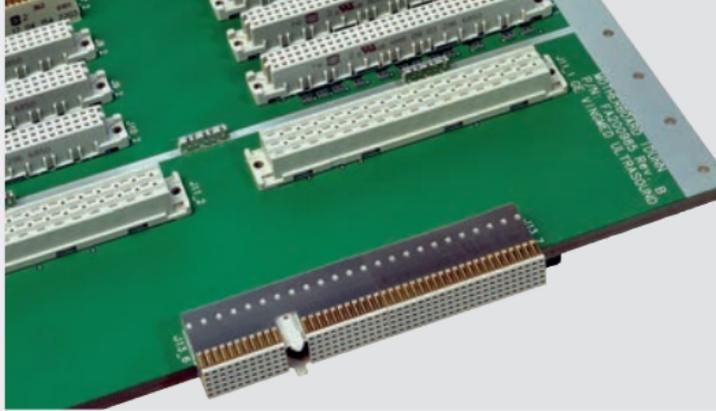

## HARTING Integrated Solutions

HARTING **Integrated Solutions** (HIS) is the backplane and backplane systems assembly business unit for the HARTING Technology Group.

Manufacturing on 3 Continents, Europe, Asia and North America, based on a 'Global Footprint' of common equipment, tooling and procedures and providing a world-wide service to our customers.

<b>Backplane design, signal integrity services:</b>	<ul style="list-style-type: none"> <li>Standard and customized backplane design/layout</li> <li>Simulation and modeling</li> <li>Measurement and verification</li> </ul>
<b>Manufacturing</b>	<ul style="list-style-type: none"> <li>Focused on backplane assembly, prototypes to volume production</li> <li>Assembly standards to IPC610 'J' Standard</li> <li>- All assembly to the highest level, Class III</li> <li>- Continuous training with in-house trainers</li> <li>SMT – press-in – wave solder</li> <li>Ability to handle large, high layer-count PCB's</li> <li>FAST PROTOTYPE SERVICE</li> <li>Vertical integration</li> <li>- Full integration services</li> <li>- Cardframes, cabinets</li> </ul>
<b>Test</b>	<ul style="list-style-type: none"> <li>All products tested – State-of-the-art robotic backplane testers including optical inspection</li> <li>System functional and safety testing</li> </ul>



EN ISO 9001 and 14 001 certified



## Cabling systems and cable assemblies

HARTING offers a comprehensive portfolio of cable assemblies. This portfolio range includes solutions based on copper, to hybrid and up to glass fibre assemblies.

Any cable assembly is pre-terminated with high-quality HARTING connectors used for power, signal and data connections.

Different length and customised solutions, including overmoulding, meet a wide range of the customer applications.

With the PushPull fibre optic, QSFP+ and SFP+ cable assemblies HARTING is supporting the increasing data transmission rates required by the market. These high-speed cable assemblies are usable up to 40 Gbit per second.

The HARTING PushPull technology and the classic Han® 3 A housings with their optical and copper-based inserts open up new applications in industry, wind power and camera systems for indoor and outdoor applications.

Press and Go is setting a new standard for meeting individual customer requirements, no matter whether the cable has a diameter of 4.5 mm or 8.6 mm. The Press and Go method that HARTING has developed can always be counted on to be fast! M12 Press and Go offers individually adjustable and dependable connection technology – dispensing entirely with screwing.



EN ISO 9001 and 14001 certified



## Cabling systems

### Profile-specific cabling

A complete range of cabling components for the installation of a profile-specific passive infrastructure in industry, especially in automation. Universal 4-wire resp. 8-wire screened cabling for the connection of automation solutions and control units in harsh IP65 / IP67 environments and for outdoor areas.

### Specification

Network installation according to ISO/IEC 61 918 and the guidelines of specific automation protocols (profiles) like:

- PROFINET
- EtherCAT
- Ethernet Powerlink
- SERCOS III

Network installation according to ISO/IEC 24 702 and EN 50 173-3 (Structured Cabling in Industrial Environments).

Suitable for the transmission of data via Ethernet –  
Ethernet transmission according to IEEE 802.3 at 10 Mbit/s and 100 Mbit/s –  
transmission characteristics Category 5 / Transmission Class D up to 100 MHz  
and Category 6 / Transmission Class E up to 250 MHz according to  
ISO/IEC 11 801:2002.



EN ISO 9001 and 14 001 certified



## Cable assemblies

### Advantages

- Real-time capable and future-proof cabling suitable for Gigabit Ethernet and beyond - in compliance with ISO/IEC 24702
- In compliance with ISO/IEC 61918 and with the guidelines of several user organisation groups
- No assembly work
- Pre-termination of customised solutions
- Standardised housings
- Small form factor in IP20 / IP65 / IP67
- Pre-terminated cable assemblies tested and ready to use
- High data transmission rates

### Cable assembly series

Press and Go, QSFP+, SFP+, M12, M8, Mini Coax, SEK, *har-flex*<sup>®</sup>, DIN 41612, D-Sub, D-Sub HD, *har-mik*<sup>®</sup>, *har-link*<sup>®</sup>, HARTING PushPull, HARTING PushPull LC duplex, Han<sup>®</sup> PushPull, Hybrid (Han<sup>®</sup> 3 A RJ45 / Han<sup>®</sup> 3 A FO), Han<sup>®</sup> SFP, Han<sup>®</sup> 3 A 2xLC duplex, Han<sup>®</sup> PushPull SCRJ, IP20 Fiber optic jumper cords, RJ45 (IP20), Ha-VIS preLink<sup>®</sup>

### Designs

Overmoulded and standard solutions available, depending on the application. The housings are available in plastic, metallized plastic and metal.



EN ISO 9001 and 14001 certified

# HARTING eCatalogue

The **HARTING eCatalogue** is an electronic catalogue with a part configuration and 3D components library.


Here you can choose a connector according to your requirements. Afterwards you are able to send your inquiry directly to a HARTING sales partner.

The drawings to every single part are available in PDF-format.


The parts are downloadable in 2D-format (DXF) and 3D-format (IGES, STEP).

The 3D-models can be viewed with a VRML-viewer.

You can find the **HARTING eCatalogue** at [www.HARTING.com](http://www.HARTING.com).

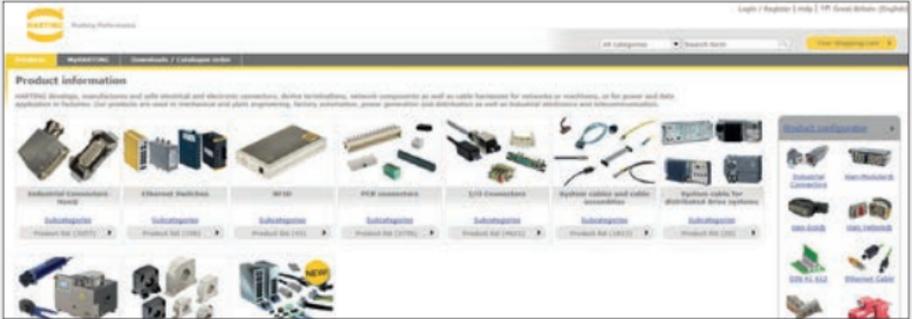

Product overview

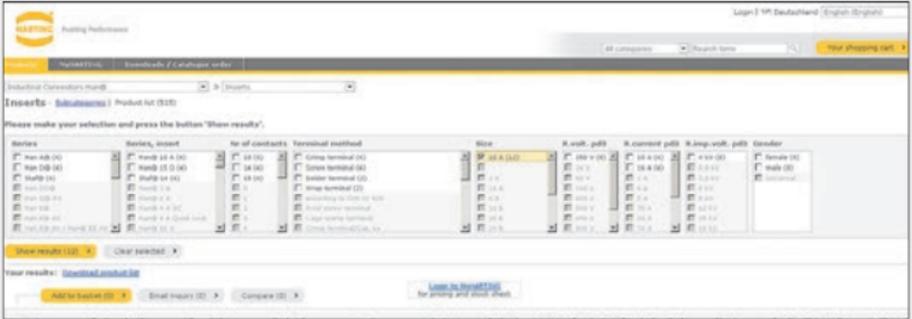

Product selection



Product configuration



Product combination

## Sales Network – worldwide

### **Afghanistan**

see United Arab Emirates

**Albania** – see Austria

### **Argentina**

Condelectric S.A.  
Hipólito Yrigoyen 2591  
1640 – Martínez  
Buenos Aires – Argentina  
Phone +54 11 4836 1053  
Fax +54 11 4836 1053  
comercial@condelectric.com.ar

**Armenia** – see Russia

### **Australia**

HARTING Pty Ltd  
Suite 11 / 2 Enterprise Drive  
Bundoora 3083, AUS-Victoria  
Phone +61 3 9466 7088  
Fax +61 3 9466 7099  
au@HARTING.com  
www.HARTING.com.au

### **Austria**

HARTING Ges.m.b.H.  
Deutschstraße 19, A-1230 Wien  
Phone +43 1 6162121  
Fax +43 1 6162121-21  
at@HARTING.com  
www.HARTING.at

**Azerbaijan** – see Turkey

**Bahrain** – see United Arab Emirates

**Belarus** – see Russia

### **Belgium**

HARTING N.V./S.A.  
Z.3 Doornveld 23, B-1731 Zellik  
Phone +32 2 466 0190  
Fax +32 2 466 7855  
be@HARTING.com  
www.HARTING.be

### **Bosnia and Herzegovina**

see Austria

### **Brazil**

HARTING Ltda.  
Rua Major Paladino 128; Prédio 11  
CEP 05307-000 São Paulo  
SP – Brazil  
Phone +55 11 5035 0073  
Fax +55 11 5034 4743  
br@HARTING.com  
www.HARTING.com.br

**Brunei** – see Singapore

**Bulgaria** – see Austria

### **Canada**

HARTING Canada Inc.  
8455 Trans-Canada Hwy., Suite 202  
St. Laurent, QC, H4S1Z1, Canada  
Phone 855-659-6653  
Fax 855-659-6654  
info.ca@HARTING.com  
www.HARTING.ca

### **China**

HARTING (Zhuhai) Sales Ltd.  
Shanghai Branch  
Room 3501, Grand Gateway I  
No. 1 Hong Qiao Road  
Xu Hui District  
Shanghai 200030, China  
Phone +86 21 6386 2200  
Fax +86 21 6386 8636  
cn@HARTING.com  
www.HARTING.com.cn

**Croatia** – see Austria

### **Czech Republic**

HARTING s.r.o.  
Mlýnská 2, CZ-160 00 Praha 6  
Phone +420 220 380 460  
Fax +420 220 380 461  
cz@HARTING.com  
www.HARTING.cz

### **Denmark**

HARTING ApS  
Hjulmagervej 4a  
DK – 7100 Vejle  
Phone +45 70 25 00 32  
Fax +45 75 80 64 99  
dk@HARTING.com  
www.HARTING.com

**Egypt** – see United Arab Emirates

**Estonia** – see Finland

### **Finland**

HARTING Oy  
Teknobulevardi 3-5  
FI-01530 Vantaa  
Phone +358 207 291 510  
Fax +358 207 291 511  
fi@HARTING.com  
www.HARTING.fi

### **France**

HARTING France  
181 avenue des Nations  
Paris Nord 2  
BP 66058 Tremblay en France  
F-95972 Roissy Charles de Gaulle  
Cédex  
Phone +33 1 4938 3400  
Fax +33 1 4863 2306  
fr@HARTING.com  
www.HARTING.fr

### **Germany**

HARTING Deutschland  
GmbH & Co. KG  
P.O. Box 2451, D-32381 Minden  
Simeons carré 1, D-32427 Minden  
Phone +49 571 8896 0  
Fax +49 571 8896 282  
de@HARTING.com  
www.HARTING.de

**Georgia** – see Russia

### **Great Britain**

HARTING Ltd., Caswell Road  
Brackmills Industrial Estate  
GB-Northampton, NN4 7PW  
Phone +44 1604 827 500  
Fax +44 1604 706 777  
gb@HARTING.com  
www.HARTING.co.uk

### **Hong Kong**

HARTING (HK) Limited  
Regional Office Asia Pacific  
3512 Metroplaza Tower 1  
223 Hing Fong Road  
Kwai Fong, N. T., Hong Kong  
Phone +852 2423 7338  
Fax +852 2480 4378  
ap@HARTING.com  
www.HARTING.com.hk

### **Hungary**

HARTING Magyarország Kft.  
Fehérvári út 89-95  
H-1119 Budapest  
Phone +36 1 205 34 64  
Fax +36 1 205 34 65  
hu@HARTING.com  
www.HARTING.hu

**Iceland** – see Great Britain

### **India**

HARTING India Pvt Ltd  
7th Floor (West Wing)  
Central Square II  
Unit No.B-19 Part, B 20&21  
TVK Industrial Estate  
Guindy, Chennai – 600032  
Phone +91-44-43560415  
+91-44-43456262  
Fax +91-44-43560417  
in@HARTING.com  
www.HARTING.in

**Indonesia** – see Malaysia

**Iran** – see United Arab Emirates

**Iraq** – see United Arab Emirates

### **Israel**

COMTEL  
Israel Electronic Solutions Ltd.  
Bet Hapamon, 20 Hataa st.  
P.O.Box 66  
Kefar-Saba 44425  
Phone +972-9-7677240  
Fax +972-9-7677243  
sales@comtel.co.il  
www.comtel.co.il

### **Italy**

HARTING SpA  
Via Dell' Industria 7  
I-20090 Vimodrone (Milano)  
Phone +39 02 250801  
Fax +39 02 2650 597  
it@HARTING.com  
www.HARTING.it

### **Japan**

HARTING K. K.  
Yusen Shin-Yokohama 1 Chome  
Bldg., 2F  
1-7-9, Shin-Yokohama, Kohoku  
Yokohama 222-0033 Japan  
Phone +81 45 476 3456  
Fax +81 45 476 3466  
jp@HARTING.com  
www.HARTING.co.jp

**Jemen** – see United Arab Emirates

**Jordan** – see United Arab Emirates

**Kazakhstan** – see Russia

**Kirghizia** – see Russia

### **Korea (South)**

HARTING Korea Limited  
B-B108, Woolim Lions Valley 5th  
302, Galmachi-ro, Jungwon-gu  
Seongnam-si, Gyeonggi-do  
462-739, Korea  
Phone +82 31 750 0380  
Fax +82 31 781 4616  
kr@HARTING.com  
www.HARTING.co.kr

**Kosovo** – see Austria

**Kuwait** – see United Arab Emirates

**Latvia** – see Finland

### **Lebanon**

see United Arab Emirates

**Lithuania** – see Finland

**Macedonia** – see Austria

**Malaysia (Office)**

HARTING Singapore Pte Ltd  
 Malaysia Branch  
 11-02 Menara Amcorp  
 Jln. Persiaran Barat  
 46200 PJ, Sel. D. E., Malaysia  
 Phone +60 3 / 7955 6173  
 Fax +60 3 / 7955 5126  
 sg@HARTING.com

**Montenegro** – see Austria

**Netherlands**

HARTING B.V.  
 Larenweg 44  
 NL-5234 KA 's-Hertogenbosch  
 Postbus 3526  
 NL-5203 DM 's-Hertogenbosch  
 Phone +31 736 410 404  
 Fax +31 736 440 699  
 nl@HARTING.com  
 www.HARTINGbv.nl

**New Zealand** – see Australia

**Norway**

HARTING A/S  
 Øststensjøveien 36, N-0667 Oslo  
 Phone +47 22 700 555  
 Fax +47 22 700 570  
 no@HARTING.com  
 www.HARTING.no

**Oman** – see United Arab Emirates

**Pakistan** – see United Arab Emirates

**Philippines** – see Malaysia

**Poland**

HARTING Polska Sp. z o. o  
 ul. Duńska 9  
 PL-54-427 Wrocław  
 Phone +48 71 352 81 71  
 Fax +48 71 350 42 13  
 pl@HARTING.com  
 www.HARTING.pl

**Portugal**

HARTING Iberia, S. A.  
 C\Viriato, 47 8º, Edificio Numancia 1  
 E-08014 Barcelona  
 Phone +351 219 673 177  
 Fax +351 219 678 457  
 es@HARTING.com  
 www.HARTING.es/pt

**Qatar** – see United Arab Emirates

**Republic of Moldova**

see Romania

**Romania**

HARTING Romania SCS  
 Europa Unita str. 21  
 550018-Sibiu, Romania  
 Phone +40 369-102 671  
 Fax +40 369-102 622  
 ro@HARTING.com  
 www.HARTING.com

**Russia**

HARTING ZAO  
 Maliy Sampsoniyevsky prospect 2A  
 194044 Saint Petersburg, Russia  
 Phone +7 812 327 6477  
 Fax +7 812 327 6478  
 ru@HARTING.com  
 www.HARTING.ru

**Saudi Arabia**

see United Arab Emirates

**Serbia** – see Austria

**Singapore**

HARTING Singapore Pte Ltd.  
 25 International Business Park  
 #04-108 German Centre  
 Singapore 609916  
 Phone +65 6225 5285  
 Fax +65 6225 9947  
 sg@HARTING.com  
 www.HARTING.sg

**Slovakia**

HARTING s.r.o.  
 Sales office Slovakia  
 J. Simora 5, SK - 940 52 Nové Zámky  
 Phone +421 356-493 993  
 Fax +421 356-402 114  
 sk@HARTING.com  
 www.HARTING.sk

**Slovenia** – see Austria

**South Africa**

HARTING South Africa (Pty) Ltd  
 Ground Floor, Twickenham Building  
 The Campus  
 Cnr Main & Sloane Street  
 Bryanston, Johannesburg 2021  
 Phone +27 (0) 11 575 0017  
 Fax +27 (0) 11 576 6000  
 za@HARTING.com  
 www.HARTING.co.za

**Spain**

HARTING Iberia S.A.  
 C\Viriato, 47 8º, Edificio Numancia 1  
 E-08014 Barcelona  
 Phone +34 93 363 84 75  
 Fax +34 93 419 95 85  
 es@HARTING.com  
 www.HARTING.es

**Sweden**

HARTING AB  
 Gustavslundsvägen 141 B 4tr  
 S-167 51 Bromma  
 Phone +46 8 445 7171  
 Fax +46 8 445 7170  
 se@HARTING.com  
 www.HARTING.se

**Switzerland**

HARTING AG  
 Industriestrasse 26  
 CH-8604 Volketswil  
 Phone +41 44 908 20 60  
 Fax +41 44 908 20 69  
 ch@HARTING.com  
 www.HARTING.ch

**Syria** – see United Arab Emirates

**Taiwan**

HARTING Taiwan Ltd.  
 Room 1, 5/F  
 495 GuangFu South Road  
 RC-110 Taipei, Taiwan  
 Phone +886 2 2758 6177  
 Fax +886 2 2758 7177  
 tw@HARTING.com  
 www.HARTING.com.tw

**Tajikistan** – see Russia

**Thailand** – see Malaysia

**Turkey**

HARTING TURKEI Elektronik Ltd. Şti.  
 Barbaros Mah. Dereboyu Cad.  
 Fesleğen Sok.  
 Uphill Towers, A-1b Kat:8 D:45  
 34746 Ataşehir, İstanbul  
 Phone +90 216 688 81 00  
 Fax +90 216 688 81 01  
 tr@HARTING.com  
 www.HARTING.com.tr

**Turkmenistan** – see Russia

**Ukraine** – see Poland

**United Arab Emirates**

HARTING Middle East FZ-LLC  
 Knowledge Village, Block 2A,  
 Office F72  
 P.O. Box 454372, Dubai  
 United Arab Emirates  
 Phone +971 4 453 9737  
 Fax +971 4 439 0339  
 uae@HARTING.com  
 www.HARTING.ae

**USA**

HARTING Inc. of North America  
 1370 Bowes Road  
 USA-Elgin, Illinois 60123  
 Phone +1 (877) 741-1500 (toll free)  
 Fax +1 (866) 278-0307 (Inside  
 Sales)  
 us@HARTING.com  
 www.HARTING-USA.com

**Uzbekistan** – see Russia

**Vietnam** – see Singapore

**Distributors – worldwide**

Digi-Key Corporation:  
 www.digikey.com

Farnell: www.farnell.com

FUTURE Electronics:  
 www.futureelectronics.com

Mouser Electronics:  
 www.mouser.com

RS Components:  
 www.rs-components.com

**Other countries and general contact**

HARTING Electric GmbH & Co. KG  
 P.O. Box 1473, D-32328 Espelkamp  
 Phone +49 5772 47-97100  
 Fax +49 5772 47-495  
 electric@HARTING.com

HARTING Electronics GmbH  
 P.O. Box 1433, D-32328 Espelkamp  
 Phone +49 5772 47-97200  
 Fax +49 5772 47-777  
 electronics@HARTING.com



**Pushing Performance**

**HARTING.com** –  
the gateway to your  
country website.

---

[www.HARTING.ae](http://www.HARTING.ae)  
[www.HARTING.at](http://www.HARTING.at)  
[www.HARTING.com.au](http://www.HARTING.com.au)  
[www.HARTING.be](http://www.HARTING.be)  
[www.HARTING.com.br](http://www.HARTING.com.br)  
[www.HARTING.ca](http://www.HARTING.ca)  
[www.HARTING.ch](http://www.HARTING.ch)  
[www.HARTING.com.cn](http://www.HARTING.com.cn)  
[www.HARTING.cz](http://www.HARTING.cz)  
[www.HARTING.de](http://www.HARTING.de)  
[www.HARTING.dk](http://www.HARTING.dk)  
[www.HARTING.es](http://www.HARTING.es)  
[www.HARTING.fi](http://www.HARTING.fi)  
[www.HARTING.fr](http://www.HARTING.fr)  
[www.HARTING.co.uk](http://www.HARTING.co.uk)  
[www.HARTING.com.hk](http://www.HARTING.com.hk)  
[www.HARTING.hu](http://www.HARTING.hu)  
[www.HARTING.co.in](http://www.HARTING.co.in)  
[www.HARTING.it](http://www.HARTING.it)  
[www.HARTING.co.jp](http://www.HARTING.co.jp)  
[www.HARTING.co.kr](http://www.HARTING.co.kr)  
[www.HARTINGbv.nl](http://www.HARTINGbv.nl)  
[www.HARTING.no](http://www.HARTING.no)  
[www.HARTING.pl](http://www.HARTING.pl)  
[www.HARTING.pt](http://www.HARTING.pt)  
[www.HARTING.ro](http://www.HARTING.ro)  
[www.HARTING.ru](http://www.HARTING.ru)  
[www.HARTING.se](http://www.HARTING.se)  
[www.HARTING.sg](http://www.HARTING.sg)  
[www.HARTING.sk](http://www.HARTING.sk)  
[www.HARTING.com.tr](http://www.HARTING.com.tr)  
[www.HARTING.com.tw](http://www.HARTING.com.tw)  
[www.HARTING-USA.com](http://www.HARTING-USA.com)  
[www.HARTING.co.za](http://www.HARTING.co.za)

**HARTING Technology Group**  
[info@HARTING.com](mailto:info@HARTING.com)  
[www.HARTING.com](http://www.HARTING.com)

MO/2015-02-20/10.0 98 42 001 0201 Version 01 11