
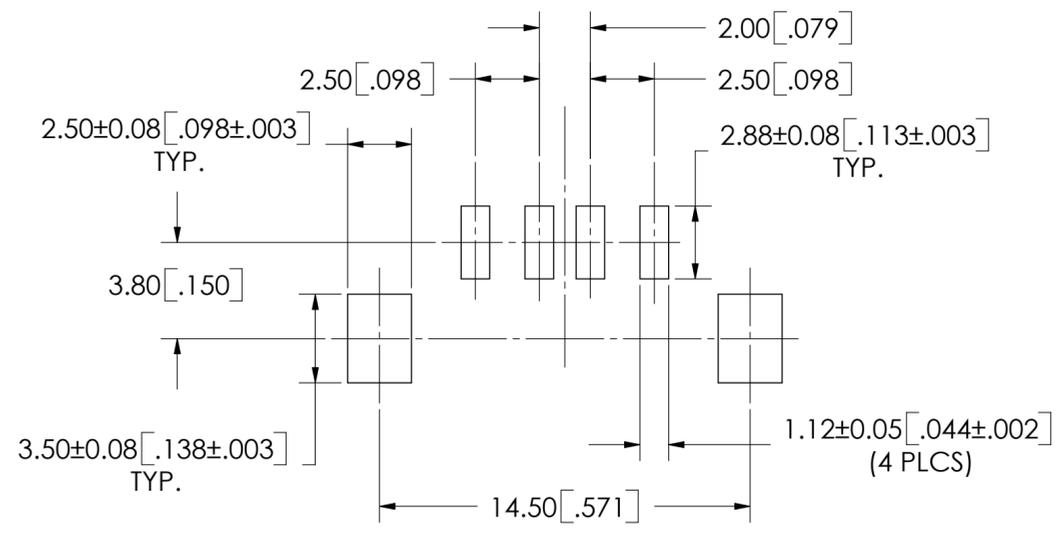


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PROPOSAL	2004/01/27	K.B.
B	CHANGE TO SMT TAB	2004/03/17	K.B.

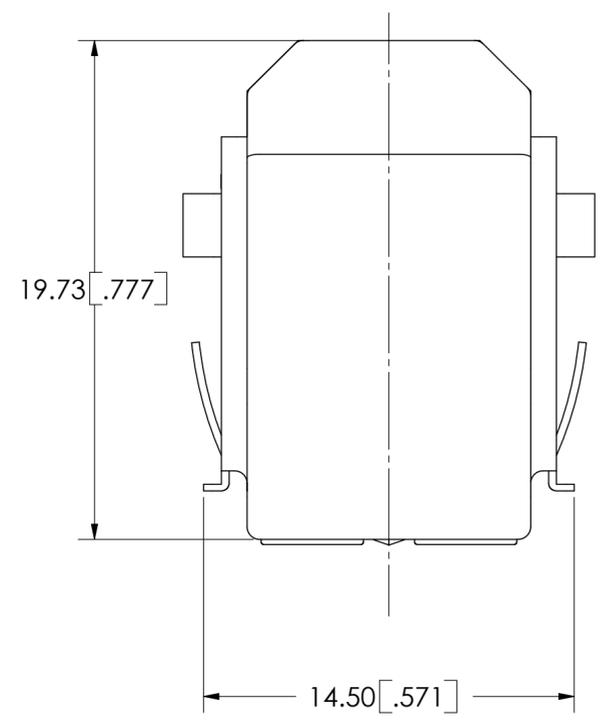





RECOMMENDED PC BOARD LAYOUT
(COMPONENT SIDE OF BOARD)

MATERIAL AND FINISH:

CONTACTS: PHOSPHOR BRONZE
PLATING: 30 MICRO" (0.76 MICRONS) GOLD,
OVER NICKEL ON MATING AREA.
100 MICRO" (2.54 MICRONS) TIN/LEAD
ON TAIL

SHELL: COPPER ALLOY
PLATING: NICKEL OVERALL

HOUSING AND LOCK TAB: ENGINEERING THERMOPLASTIC, GLASS FILLED
COLOR: BLACK
FLAMMABILITY: UL94V-0

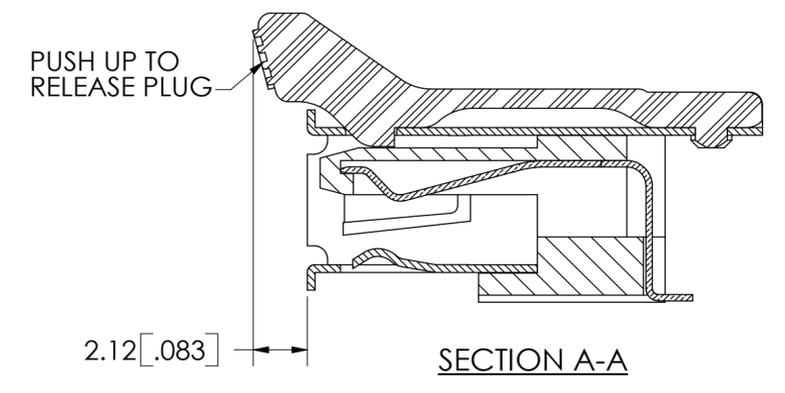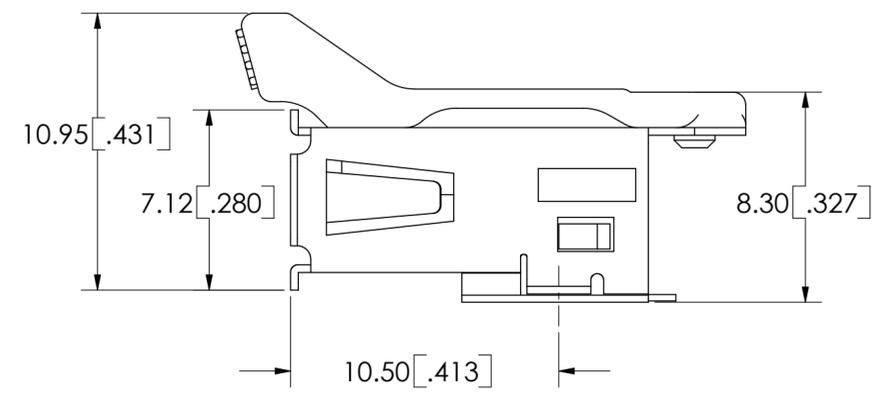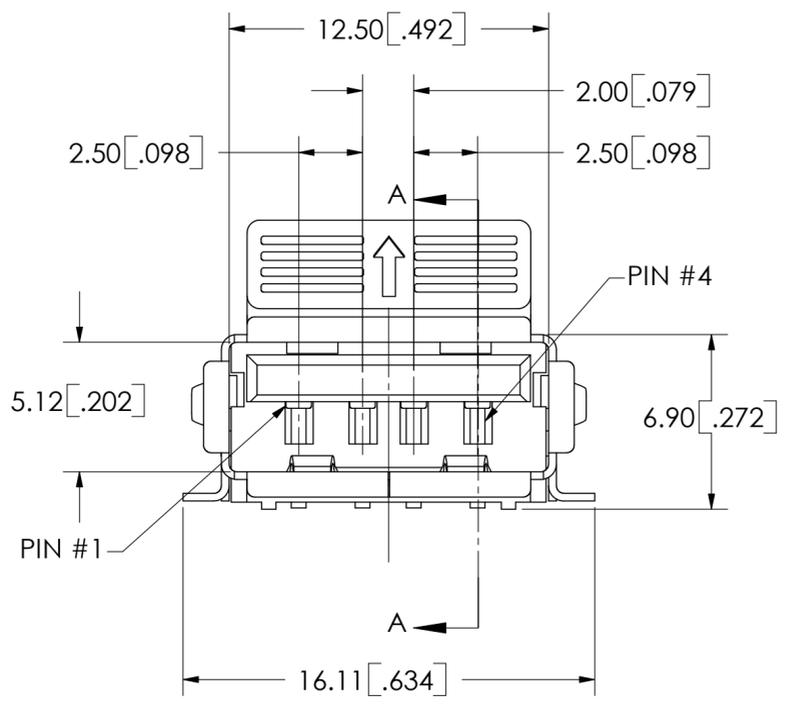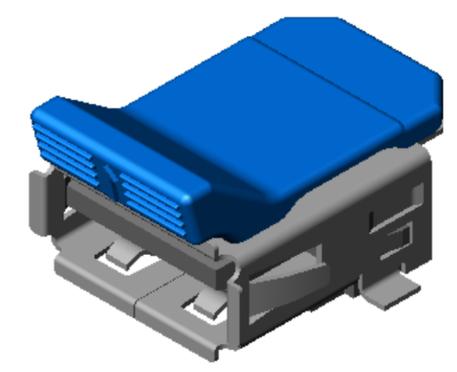

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETER TOLERANCES ARE: DECIMALS .XX± .10 .X± .25 ANGLES ± 3° MATERIAL AND FINISH SEE NOTE REF. CODE IDENT. NO.	APPROVALS	DATE	Amphenol Rugged Mobile Devices		
	DRAWN L.DENG	2004/01/26			
	DESIGNED L.DENG	2004/01/26	TITLE UNIVERSAL SERIAL BUS RECEPTACLE WITH POSITIVE LOCKING TAB SERIES A STANDARD, SMT TYPE		
	CHECKED K.BOUTROS	2004/01/28			
	QA APP'D		SIZE C	DWG. NO. P-1247CF	REV. B
DWG APP'D K.BOUTROS	2004/01/28	SCALE 5:1	PROJECT XXX	SHEET 1 OF 1	